

# Legacy “Comfort” Pencil Kit

Available at [www.thewoodturningstore.com](http://www.thewoodturningstore.com)

## Assembly Instructions

### Description:

The “Comfort” model is considered a step up from the basic Slimline or Fancy kits and is great for those new to pen turning. The Comfort pencil has a slightly larger pen diameter than the slimline and also gives you the option of adding a silicone grip to the lower tube.

The Comfort model uses 7mm brass tubes of equal length (2 1/32” long). The upper tube is tapered from narrow near the cap to a larger diameter near the center band. The lower tube is a larger diameter and usually turned straight or with a slight taper near the tip. The lower tube is either turned full length or shortened if desired to install the optional silicone rubber “Comfort” grip.

The Comfort pencil is available in a wide range of finishes (Gold, Silver, Gun Metal, etc). You can also customize your Comfort pencils with a wide variety of decorative pen clips.


### Getting Started:

You will need the following accessories to make a Comfort pencil. Many of these accessories can be used with other pen kits. (All accessories are available at [www.thewoodturningstore.com](http://www.thewoodturningstore.com))

- 1 wood or acrylic blank, approximately 5 inches long x 5/8” x 5/8”
- 7mm drill bit
- Woodturning pen mandrel with 7mm rod
- Comfort pen bushing set
- Pen barrel trimmer (7mm)
- Glue (CA, epoxy or polyurethane [Gorilla])
- Lathe, turning tools, sandpaper, pen finish
- Other items may be needed as desired



### Parts of the Comfort Pencil Kit:

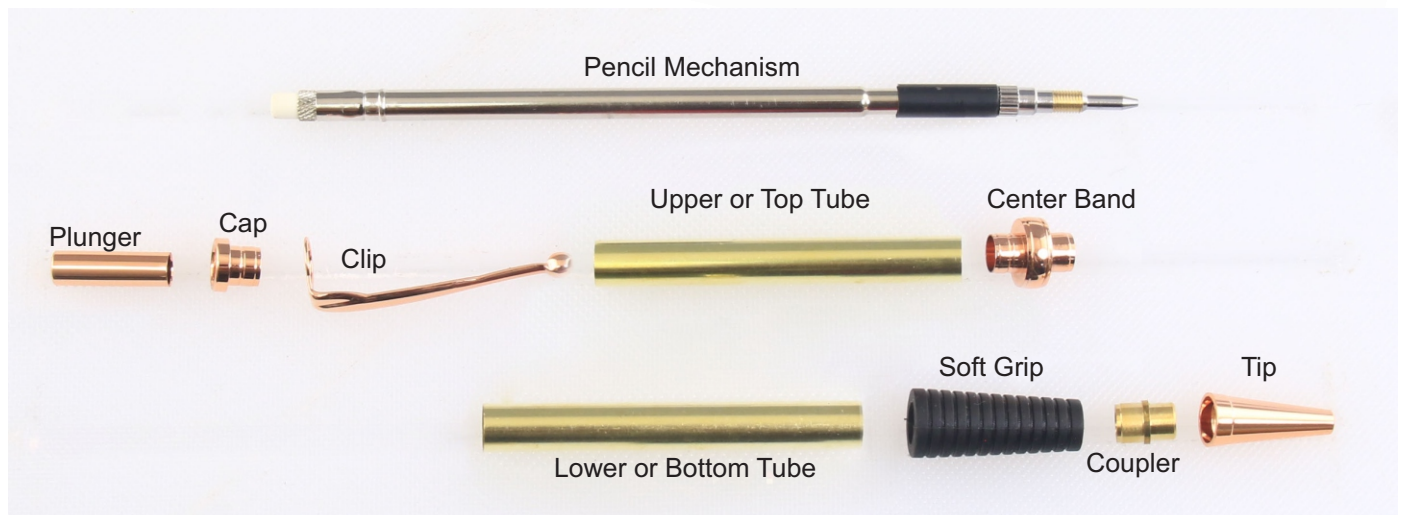


### Preparing the Blank for Turning:

- Start with your wood or acrylic blank and cut it in half so you have 2 pieces, each about 2 ½” in length. Mark the blank with “hash marks” at the cut line so you can keep the grain matched when you mount the blanks on the pen mandrel.
- Using a 7mm twist drill, drill a hole through each blank. Be careful to drill slowly to avoid chipping and tearing the material. Also, it is highly recommended that you clamp the blank in a vise and use a drill press for the most accurate and straight hole. You could also mount each blank in a lathe chuck and drill the hole using your lathe.
- Roughen the surface of each brass tube with steel wool or fine sandpaper. Using one of the glues mentioned previously, glue the brass tube into the blank. Twist the tube when inserting it into the blank to insure good glue coverage. Center the tube in the blank, make sure the tube is at least 1/16” - 1/8” inside the blank so you can trim the blank end cleanly.
- Use a pen barrel trimmer (7mm) to square the ends of the blank to the brass tube. This is an important step which will create a clean line between the turned blank and the metal components of the pen kit.
- Your blanks are now ready to be mounted on the lathe.

### Turning the blanks on the lathe

- Use a pen turning mandrel with a 7mm shaft and Comfort pen bushings (available at our store). You will need at least three bushings.
- Mount the pen blanks on the mandrel as shown in the diagram below. Make sure that your “hash marks” are in the center which assures that the grain of your blank will match that of the original single piece blank. Adjust the mandrel shaft so that the lock nut will tighten down on the assembly of pen blanks and bushings. Hand tighten the nut.
- Put a live center in your lathe’s tailstock and bring it in to support the mandrel shaft and keep it stable while turning.
- Using turning tools, turn the blanks to cylinders which are the diameter of the bushings. Note that the upper bushing (close to the cap) is narrow in diameter like a slimline bushing. The center and lower bushing is larger in diameter.
- You can turn the lower pen blank either full length or shorter as shown to install the silicone rubber grip.
- Note: Many turners prefer to turn the blank slightly oversize and then sand and polish the blank down to the exact size of the bushings.

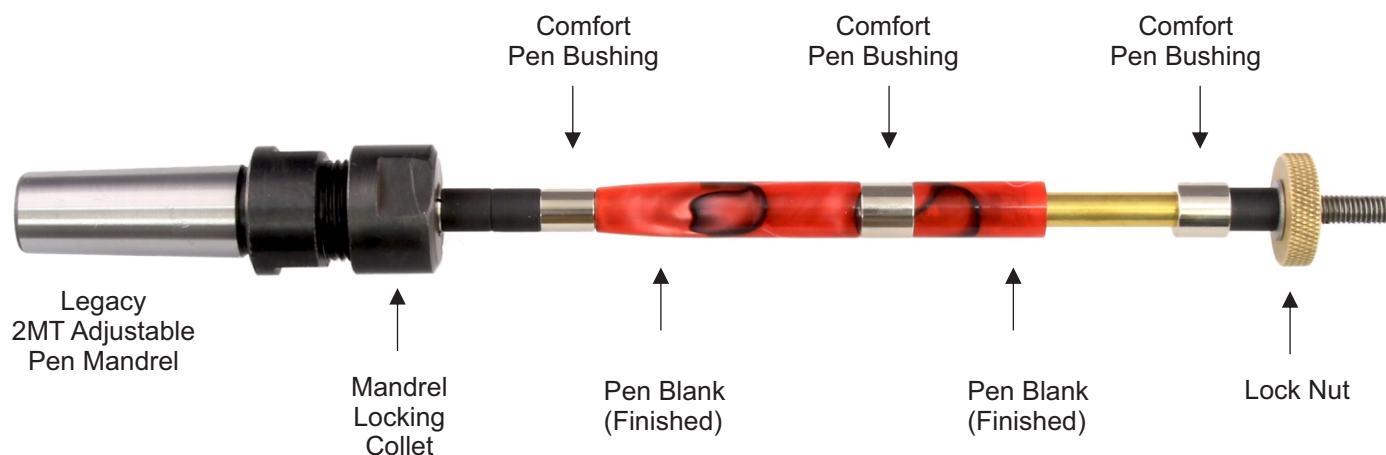

### **Sanding, Polishing and Finishing the blank**


- Most pens are finished to a high luster and finished with a durable coating of protective finish. Depending on your skill level and the material being used, you will need to sand with aluminum oxide paper of progressively finer grits, starting with a grit coarse enough to remove all tool marks and possibly shape the blank.
- If you have turned your piece oversize or if it is rough, you can smooth and even shape your blank with 80-100 grit sandpaper. Use a high lathe speed (2000+ RPM) but be careful not to overheat your piece which could cause heat checking.
- Progress through finer and finer grits 120, 180, 240, 320, 400, 600, etc.
- For acrylic materials you can use sandpaper up to 1000 grit then switch to micro mesh pads (up to 12000) and polishing cream to get a superior glossy finish.
- There are many finishes available for pens and you can experiment with what works best for you and the materials you use. Try to use a finish which will be durable and long lasting because the pen will be handled thousands of times and you want the finish to stay on and not be worn away (especially if you have sold the pen!).
- Remove the blanks from the pen mandrel and you are ready to assemble your pencil.

# Legacy “Comfort” Pencil Kit

Available at [www.thewoodturningstore.com](http://www.thewoodturningstore.com)

## Assembly Instructions

### Assembly of the Finished Pencil:

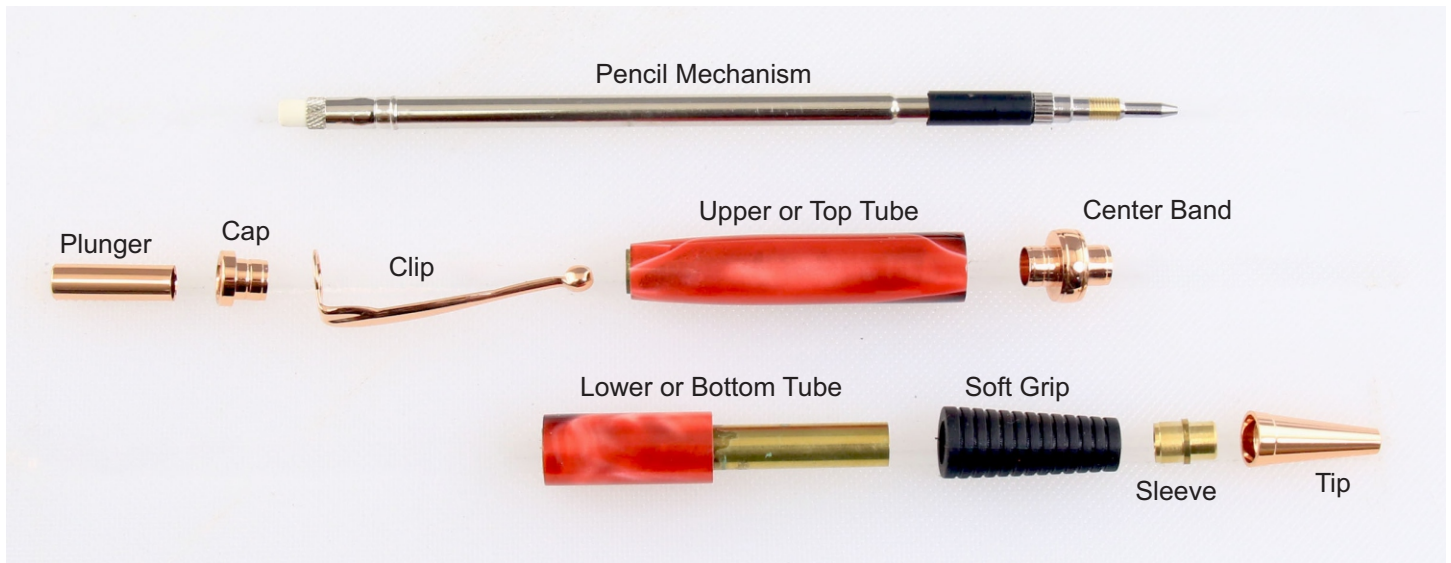

- Now that you have turned and finished the blanks into the upper and lower halves, you are ready to assemble your pencil.
- It is highly recommended that you use a vise or clamp to assemble the pencil. It is essential that you press the parts together “straight”. If you press the parts together and they are not straight, they will not straighten as you continue to press. There are many commercially available pen presses which make the process simple and easy.
- Before you press the parts together, lay out your blanks so that you recall how the grain originally matched.
- If you have chosen to turn the lower blank shorter for the silicone grip, install the rubber grip at this time.
- Press the cap through the clip and into the narrow end of the upper tube.
- Press the center band into the wider end of the upper tube. Then press the other end of the center band onto the wider end of the lower tube.
- Press the sleeve, wider end first, into the lower end of the lower tube. Note: the sleeve can bent if you press it too hard. You may want to put the tip over it while pressing to protect the sleeve.
- Insert the pencil mechanism through the open cap until the thread is showing at the other end of the pencil. Thread the tip onto the mechanism.
- Push the plunger over the eraser. Click the plunger to advance the lead.
- Your pencil is complete! To fill the pencil with lead, pull out the plunger and eraser and drop the lead inside the storage compartment. Plunge until the lead comes through the tip.